


# AquaDam® Project Assessment

**Fax to (707) 768-2116**


Company name:		Project name:	
Contact:		Project location:	
Address:		Work to be performed:	
City, State, Zip:		Bid date:	Installation date:
Phone:	Fax:	Required linear footage:	Please circle one: PURCHASE                  RENTAL
How did you hear about us?		If rental, for what duration:	

Installation conditions (please circle): <b>STATIC WATER</b> <b>FLOWING WATER</b> <b>TIDAL WATER</b> <b>DRY LAND</b>	
If flowing, approximate CFS volume:	Maximum anticipated water depth:
Maximum water depth during project life:	
How will water be passed around the work area (please circle): <b>PIPES</b> <b>PUMPS</b> <b>DIVERSION CHANNEL</b> <b>OTHER</b>	If other, please specify:
Surface conditions at installation site (please circle): <b>SILT</b> <b>SAND</b> <b>GRAVEL</b> <b>MUD</b> <b>ROCKS</b> <b>LARGE ROCKS</b> <b>BEDROCK</b> <b>DIRT</b> <b>OTHER</b>	
If other, please describe:	If mud, silt, dirt or sand, approximate depth and consistency:
Are objects present which could potentially damage the AquaDam®? Please describe:	
Are slopes or grades present? <b>YES</b> <b>NO</b> If so, degree of slope from:	
One side of the AquaDam® to the other:	One end of the AquaDam® to the other:


Please circle the AquaDam configuration that best suits your project, or include a drawing. You may also write in the approximate dimensions to give us a better idea of the size of your application.

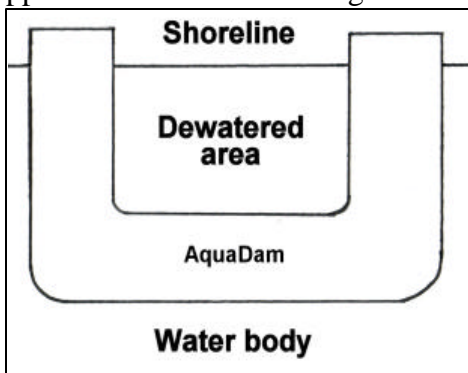

**U CONFIGURATION**

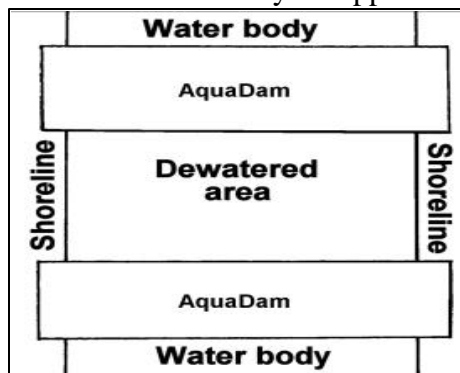

**STAGGERED CONFIGURATION**

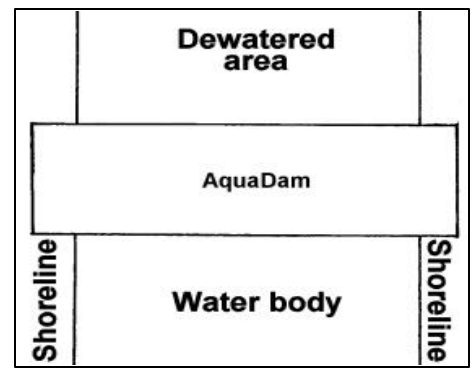

**LINE CONFIGURATION**

AquaDams can be used in a virtually unlimited variety of configurations; these represent only a few of the most common types. If you need something not shown here then please include a drawing!

When placing for an installation, position the end of the outer tube up the bank at least as high as the AquaDam® will be when fully inflated (i.e., a 3 foot high AquaDam® would have at least 4 feet in elevation up the bank. The bank slope will have to be calculated in, and the end will have to be higher than the water level inside the AquaDam® after inflation. The AquaDam® will only achieve a height of 3 feet at the lowest point along its path).